

METRO

Exterior LED bulkhead



5 YR

IP65



Features:

- High efficiency LED package ideal for perimeter and exterior lighting
- Ideal for through conduit installation
- Integral emergency version also available
- Full range of gear options including dimmable and emergency are available
- CRI: Ra>80
- Up to 70 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

Construction:

- Die-cast aluminium body finished in black (RAL 9011)
- Polycarbonate front cover and opal diffuser
- Integral driver
- Supplied as standard with neutral white (4000K) LED

Options:

- PC - Photocell
- HFS - Microwave movement sensor
- HFSD - Dimmable microwave movement sensor
- D - DALI dimming control gear
- D3 - DALI self test
- M3 - 3 hours integrated emergency
- A3 - Emergency self test

METRO

Exterior LED bulkhead

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
MET160NW	23W - 4000K	1600	23	70	1.12

Dimensions

All dimensions are in millimetres

Order code	A	B	C
MET160NW	307	257	95

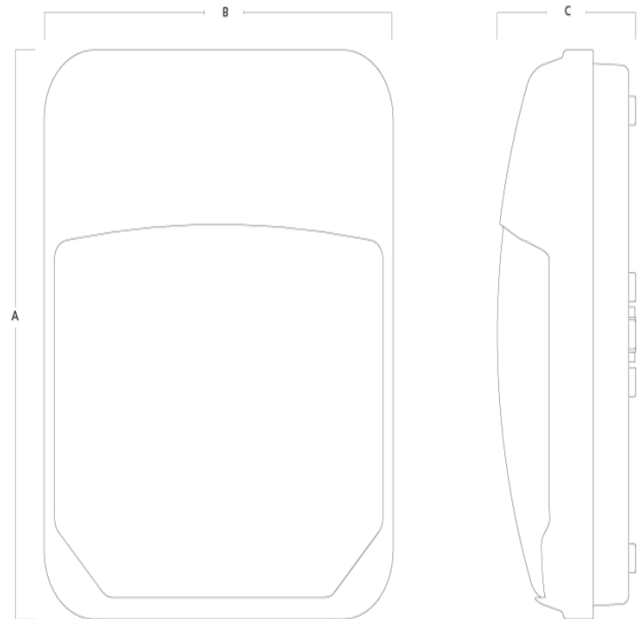

Installation instructions:

Fixed via 2 rear mounting holes and wired to 3 pole connection block via rear cable entry

To specify:

LED bulkhead as per Tamlite METRO range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.