

MICA

Circular LED bulkhead



5 YR

IP54



Features:

- Modern styling to suit exterior applications
- Supplied with high output LED array
- Available in 3 styles, plain, eyelid or grille
- Warm white (3000K) also available
- Full range of gear options including dimmable, DALI and emergency available
- CRI: Ra>80
- Up to 72 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

Construction:

- Die-cast aluminium body finished in grey (RAL 9006)
- Opal polycarbonate diffuser
- Stainless steel fixing screws
- Integral driver
- Supplied as standard with neutral white (4000K) LED

Options:

- M3 - 3 hours integrated emergency
- WW - Warm white (3000K)

MICA

Circular LED bulkhead

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
MCAP18NW	18W - 4000K - Plain	1300	18	72	1.34
MCAG18NW	18W - 4000K - Grille	1000	18	55	1.41
MCAE18NW	18W - 4000K - Eyelid	800	18	44	1.44

Dimensions

All dimensions are in millimetres

Order code	C	Diameter
MCAP18NW	55	260
MCAG18NW	55	260
MCAE18NW	55	260

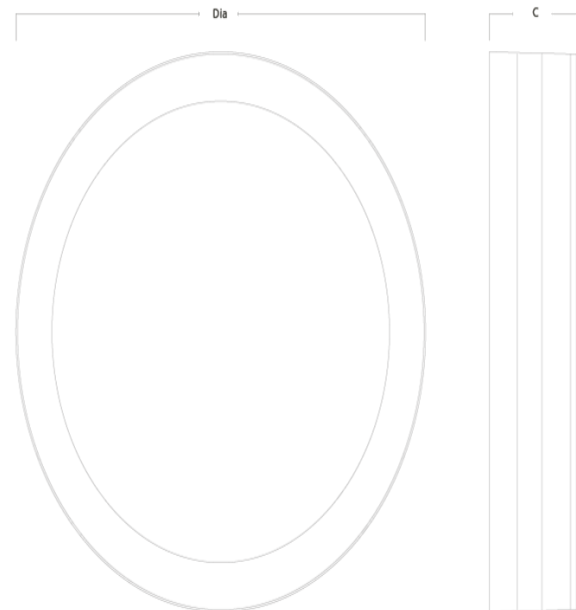

Installation instructions:

Surface mount via rear fixing holes and wired via rear cable entry

To specify:

Circular LED bulkhead as per Tamlite MICA range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.