

MICRO T5

T5 slimline batten



5 YR

IP20



Features:

- T5 lamp technology
- Compact, modern design
- Available in single and twin lamps (supplied)
- Full range of accessories and lamp options
- Point for point replacement of existing 8ft batten
- Also available in High output versions

Construction:

- Steel body finished in white (RAL 9016)
- Polycarbonate reeded diffuser optional
- High frequency control gear as standard
- Branded lamps and control gear

Options:

- V205 - Batten-fit PIR
- V206 - Batten-fit PIR and photocell
- V207 - Batten-fit with daylight dimming

MICRO T5

T5 slimline batten

Order Codes


All dimensions are in millimetres

Order code	Description	Weight (kg)
TL14	1 x 14W T5	0.75
TL214	2 x 14W T5	0.9
TL28	1 x 28W T5	1.25
TL228	2 x 28W T5	1.45
TL35	1 x 35W T5	1.5
TL235	2 x 35W T5	1.75
TL39	1 x 39W T5 high output	1.0
TL239	2 x 39W T5 high output	1.15
TL49	1 x 49W T5 high output	1.25
TL249	2 x 49W T5 high output	1.45
TL54	1 x 54W T5 high output	1.25
TL254	2 x 54W T5 high output	1.45
TL80	1 x 80W T5 high output	1.5
TL280	2 x 80W T5 high output	1.75

Dimensions

All dimensions are in millimetres

Order code	A	B	C
TL14	575	50	73
TL214	575	53	73
TL28	1175	50	73
TL228	1175	53	73
TL35	1475	50	73
TL235	1475	53	73
TL39	875	50	73
TL239	875	53	73
TL49	1475	50	73
TL249	1475	53	73
TL54	1175	50	73
TL254	1175	53	73

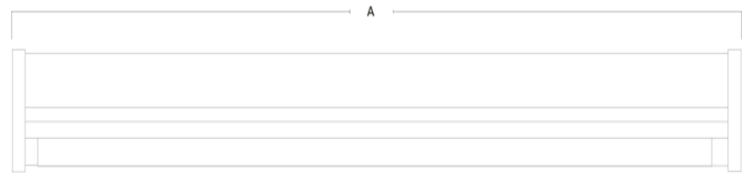

Installation instructions:

Surface mount via rear entry BESA fixings or suspended via wire suspension

To specify:

T5 fluorescent batten as per Tamlite MICRO T5 range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.