

MODLED

Low energy LED recessed modular panel



Features:

- Latest LED technology to provide maximum efficiency
- High efficiency SMD LED chips
- Modular dimensions allow easy install in most exposed T-bar ceilings
- Remote pre-wired driver supplied
- High performance opal diffuser for even light distribution
- Also available with warm white (3000K) or cool white (5000K)
- Full range of gear options including dimmable, DALI and emergency available
- CRI: Ra>80
- Up to 100 lumens per Watt efficacy
- 45,000 hours expected life (L70/B50)

Construction:

- Extruded aluminium frames finished in white (RAL 9010)
- Opal PMMA diffuser
- Multi, side-lit LED array
- Remote driver
- Supplied as standard with neutral white (4000K) LED

Options:

- HFD - Digital dimmable version
- DALI - DALI dimming control gear
- RM3 - Remote maintained 3 hours emergency
- AST - Emergency self test
- WW - Warm white (3000K)
- CW - Cool white (5000K)
- DL - Daylight (6500K)

MODLED

Low energy LED recessed modular panel

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
MODLED12330NW	30W - 4000K	3000	30	100	3.9
MODLED6630NW	30W - 4000K	3000	30	100	3.9
MODLED12650NW	50W - 4000K	5000	50	100	7.75

Dimensions

All dimensions are in millimetres

Order code	A	B	C
MODLED12330NW	1195	295	13
MODLED6630NW	595	595	13
MODLED12650NW	1195	595	13

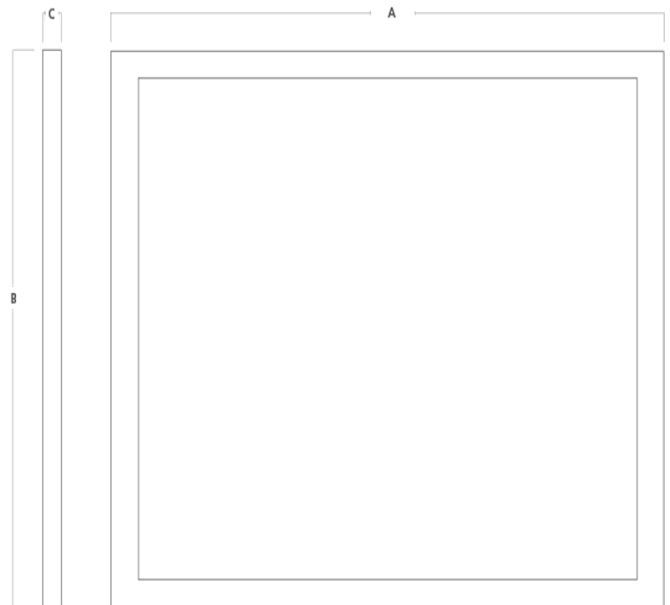

Installation instructions:

Recessed lay-in for exposed 25mm ceiling grid. Brackets available for plasterboard mount. Frame available for metal pan ceilings

To specify:

Recessed LED opal panel supplied with driver as per Tamlite MODLED range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.