

# MODLED

Low energy recessed modular panel



5 YR

IP20



### Features:

Suitable for use in hospitals, offices, schools and universities

Modular dimensions allow easy install in most exposed T-bar ceilings

High performance opal diffuser for even light distribution

Also available with warm white (3000K) or cool white (5000K)

Gear options including dimmable, DALI and emergency available

CRI: Ra>80

Up to 100 lumens per Watt efficacy

45,000 hours expected life (L70/B50)

### Construction:

Extruded aluminium frames finished in white (RAL 9010)

Opal PMMA diffuser

Multi, side-lit LED array

Supplied as standard with neutral white (4000K) LED

MODLED12330NW - Neutral white only

### Options:

D - DALI dimming control gear

D3 - DALI self test

RM3 - Remote maintained 3 hours emergency

A3 - Emergency self test

WW - Warm white (3000K)

CW - Cool white (5000K)

# MODLED

Low energy recessed modular panel

### Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
MODLED12330NW	30W - 4000K	3000	30	100	3.90
MODLED6630NW	30W - 4000K	3000	30	100	3.90
MODLED12650NW	50W - 4000K	5000	50	100	7.75

### Dimensions

All dimensions are in millimetres

Order code	A	B	C
MODLED12330NW	1195	295	13
MODLED6630NW	595	595	13
MODLED12650NW	1195	595	13

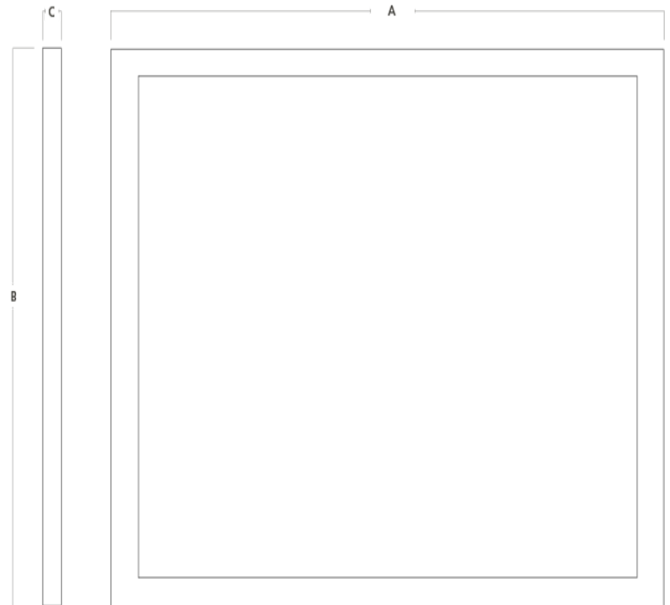

### Installation instructions:

Recessed lay-in for exposed 25mm ceiling grid. Brackets available for plasterboard mount. Frame available for metal pan ceilings

### To specify:

Recessed LED opal panel supplied with driver as per Tamlite MODLED range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.