

MODLED LG

High performance backlit module with VDT optic



Features:

Tamlite I-Tech diffuser designed for low glare reduction to BS EN-12464 compliance

Suitable for office installations and general or task area lighting

Backlit LED array for improved uniformity

Suitable for use in VDU areas such as offices, schools and universities. High output version also ideal for Retail and Commercial areas

Gear options including DALI and emergency available

Available with warm white (3000K), neutral white (4000K) or cool white (5000K) on 600mmx600mm versions

CRI: Ra>80

Up to 133 lumens per Watt efficacy

50,000 hours lifetime (L70/B50)

Construction:

Extruded aluminium body finished in white (RAL 9010)

TP (a) rated diffuser

Backlit LED array

Remote driver

Options:

D - Dimmable DALI

M3 - 3 hours integrated emergency

A3 - Emergency self test

D3 - DALI self test

WW - Warm white (3000K)

CW - Cool white (5000K)

MODLED LG

High performance backlit module with VDT optic

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
PBL66200NW	15W - 4000K	2000	15	133	2.17
PBL123200NW	15W - 4000K	2000	15	133	2.30
PBL66300NW	23W - 4000K	3000	23	130	2.17
PBL123300NW	23W - 4000K	3000	23	130	2.30
PBL66400NW	32W - 4000K	4000	32	125	2.17
PBL123400NW	32W - 4000K	4000	32	125	2.30
PBL126400NW	32W - 4000K	4000	32	125	4.20
PBL126600NW	45W - 4000K	6000	45	133	4.20
PBL126800NW	69W - 4000K	8000	69	116	4.20

Dimensions

All dimensions are in millimetres

Order code	A	B	C
PBL66200NW	595	595	35
PBL123200NW	1195	295	35
PBL66300NW	595	595	35
PBL123300NW	1195	295	35
PBL66400NW	595	595	35
PBL123400NW	1195	295	35
PBL126400NW	1195	595	35
PBL126600NW	1195	595	35
PBL126800NW	1195	595	35

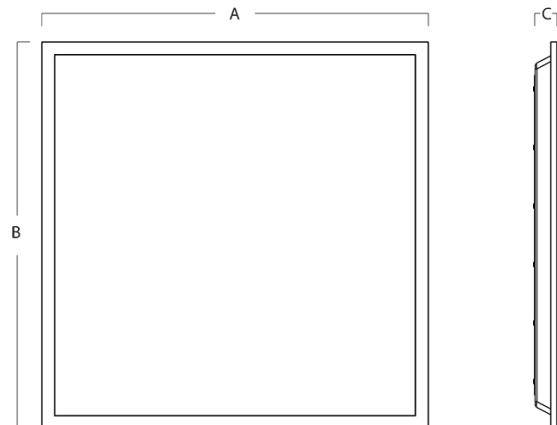

Installation instructions:

Recessed into exposed T-Bar ceiling with connection to remote driver.

To specify:

High performance backlit module with VDT optic as per Tamlite MODLED LG range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.