

NIMROD

Square or circular LED bulkhead



Features:

- High quality LED bulkhead
- High performance LED array
- Full range of gear options including dimmable, DALI and emergency are available
- CRI: Ra>80
- Up to 106 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

Construction:

- Polycarbonate body finished in black or white
- Opal or prismatic polycarbonate diffuser
- Supplied with neutral white (4000K) LED
- Note: Colour and diffuser option must be specified when ordering. HFS and HFSD for 285mm body only. PC for external use only

Options:

- PC - Photocell
- HFS - Microwave movement sensor
- HFD - Digital dimmable version
- HFSD - Dimmable microwave movement sensor
- DALI - DALI dimming control gear
- M3 - 3 hours integrated emergency
- AST - Emergency self test
- NL - Night-light
- B - Black (RAL 9005)
- W - White
- O - Opal diffuser
- PRIS - Prismatic diffuser

NIMROD

Square or circular LED bulkhead

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
NIM17LEDNW	17W - 4000K	1200	17	71	1.1
CNIM17LEDNW	17W - 4000K	1200	17	71	1.0

Dimensions

All dimensions are in millimetres

Order code	A	B	C
NIM17LEDNW	285	285	90
CNIM17LEDNW			90

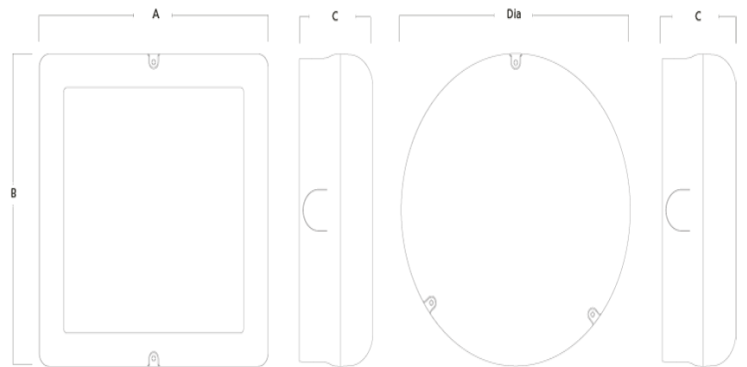

Installation instructions:

Wall or ceiling fix base mounting with rear or side cable entry and wired via rear cable entry

To specify:

LED polycarbonate IP65 bulkhead as per Tamlite NIMROD LED range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.