

NIMROD

Square or circular LED bulkhead



5 YR

IP65



Features:

- Suitable for interior and exterior applications
- Available in white or black base with opal or prismatic diffuser
- Full range of gear options including dimmable, DALI and emergency are available
- CRI: Ra>80
- Up to 106 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

Construction:

- Polycarbonate body finished in black or white
- Opal or prismatic polycarbonate diffuser
- Supplied with neutral white (4000K) LED

Options:

- PC - Photocell
- HFS - Microwave movement sensor
- HFSD - Dimmable microwave movement sensor
- D - DALI dimming control gear
- D3 - DALI self test
- M3 - 3 hours integrated emergency
- A3 - Emergency self test
- B - Black (RAL 9005)
- W - White
- O - Opal diffuser
- PRIS - Prismatic diffuser

NIMROD

Square or circular LED bulkhead

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
NIM17LEDPNW	17W - 4000K Square prismatic	1800	17	106	1.10
NIM17LEDONW	17W - 4000K Square opal	1200	17	71	1.10
CNIM17LEDPNW	17W - 4000K Circular prismatic	1800	17	106	1.00
CNIM17LEDONW	17W - 4000K Circular opal	1200	17	71	1.00

Dimensions

All dimensions are in millimetres

Order code	A	B	C
NIM17LEDPNW	285	285	90
NIM17LEDONW	285	285	90
CNIM17LEDPNW			90
CNIM17LEDONW			90

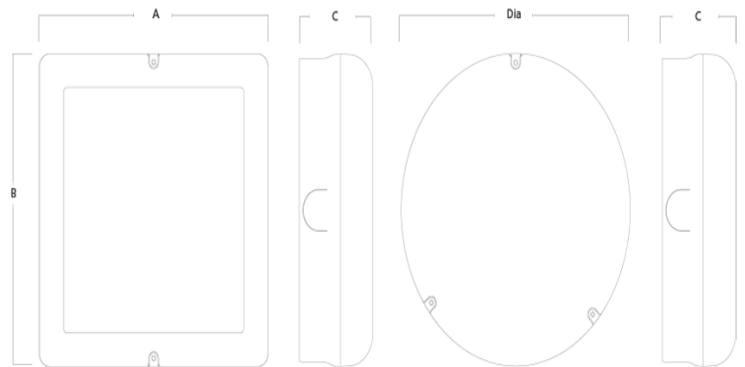

Installation instructions:

Wall or ceiling fix base mounting with rear or side cable entry and wired via rear cable entry

To specify:

LED polycarbonate IP65 bulkhead as per Tamlite NIMROD LED range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.