

OLYMPIAN

Circular suspended pendant



5 YR

IP40



Features:

Ideal for large atriums, entrances and retail spaces

Available in 3 sizes

Opal diffuser for smooth light distribution

Gear options including DALI available

CRI: Ra>80

Up to 80 lumens per Watt efficacy

50,000 hours lifetime (L70/B50)

Construction:

Die-cast aluminium body finished in white (RAL 9016)

Steel ceiling plate (200mm dia.) with wire suspensions (850mm)

Supplied as standard with neutral white (4000K) LED

Options:

D - Dimmable DALI

OLYMPIAN

Circular suspended pendant

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
OLY160NW	22W - 4000K	1600	22	73	2.61
OLY290NW	38W - 4000K	2900	38	76	2.85
OLY360NW	45W - 4000K	3600	45	80	3.05

Dimensions

All dimensions are in millimetres

Order code	C	Diameter
OLY160NW	12	300
OLY290NW	12	500
OLY360NW	12	600

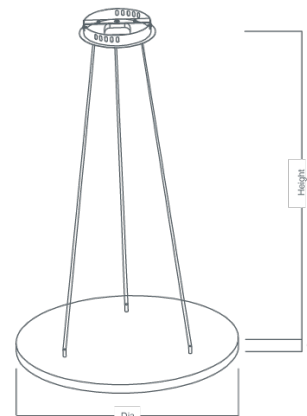

Installation instructions:

Suspended via 0.85m wire to ceiling fixing bracket with 0.85m white cable

To specify:

High output LED downlight as per Tamlite OLYMPIAN range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.