

ORBIT

Modern LED pendant



3 YR

IP20



Features:

- Suitable for reception and accent lighting applications
- 15W LED module with integral driver
- Frosted glass diffuser provides even light distribution
- Full range of gear options including dimmable AND DALI available
- CRI: Ra>80
- Up to 47 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

Construction:

- Steel body finished in white (RAL 9016) or black (RAL 9005)
- Frosted cover glass
- 1m wire suspension with power cable
- Supplied as standard with neutral white (4000K) LED

Options:

- HFD - Digital dimmable version
- DALI - DALI dimming control gear
- WW - Warm white (3000K)
- B - Black (RAL 9005)
- W - White

ORBIT

Modern LED pendant

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
TD-OR15NW	15W - 4000K	700	15	47	4.3

Dimensions

All dimensions are in millimetres

Order code	C	Diameter
TD-OR15NW	1000	500

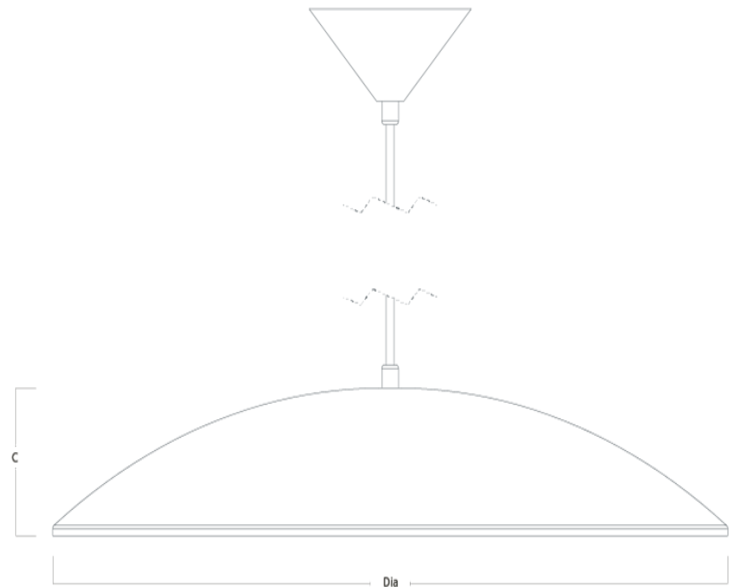

Installation instructions:

Suspended via a 1m cable and ceiling box

To specify:

Decorative LED pendant as per Tamlite ORBIT range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.