

# PLAZA

Post top LED lantern



5 YR

IP66



IK09

### Features:

- High performance LED post top lantern
- Suitable for pedestrian zones and car parking areas
- Easy clip-on design for quick install and maintenance
- Choice of 2 different distributions
- Optional photocell control
- CRI: Ra>80
- Up to 95 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

### Construction:

- Die-cast aluminium body finished in grey (RAL 9006)
- Clear polycarbonate diffuser
- Integral driver
- High impact (IK09) housing with clear lens
- Supplied as standard with neutral white (4000K) LED

### Options:

- PC - Photocell
- D - DALI dimming control gear
- WW - Warm white (3000K)
- DL - Daylight (6500K)

# PLAZA

Post top LED lantern

### Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
PLX380NW	37W - 4000K	3500	37	95	10.20
PLX560NW	55W - 4000K	5200	55	95	10.20
PLX730NW	83W - 4000K	6800	83	82	10.20

### Dimensions

All dimensions are in millimetres

Order code	C	Diameter
PLX380NW	511	496
PLX560NW	511	496
PLX730NW	511	496

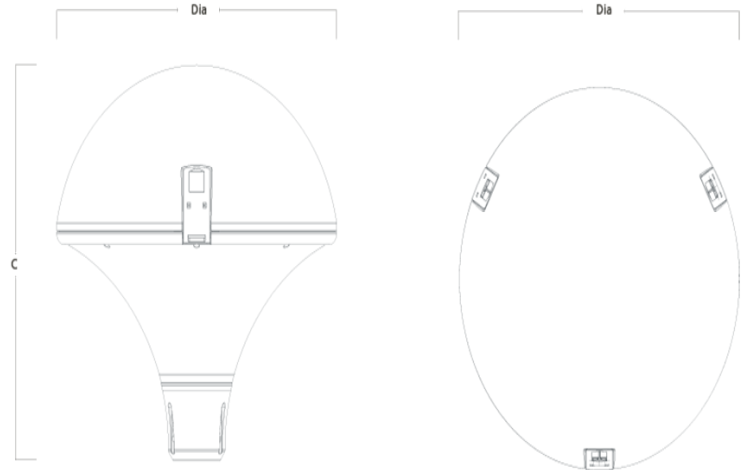

### Installation instructions:

Pole mounting via 76mm spigot entry and wired via 3 pole termination block

### To specify:

High output LED post-top lantern as per Tamlite PLAZA

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.