

# REVO FOCUS

Large area, high output luminaire



### Features:

- High output LED high bay, ideal for large leisure, retail and airport spaces
- Available in 3 sizes and 7 outputs
- Choice of 6 different beam angles for ultimate in beam control
- Uniform light level in daylight
- Optional built in uplighter for a more vibrant shopping environment
- Gear options including DALI and emergency available
- CRI: Ra>80
- Up to 150 lumens per Watt efficacy
- 60,000 hours lifetime (L80/B20)

### Construction:

- Extruded aluminium finished in white (RAL 9016)
- Clear optic lens
- Polycarbonate end caps
- Hinged side plates for easy access and maintenance
- Unique power entry access for easy and quick installation
- Unique ball bearing suspension kit with 'Y'piece adjuster
- Supplied with wide beam optic as standard
- Supplied as standard with neutral white (4000K) LED

### Options:

- V102 - Fixed output PIR sensor with photocell
- V103 - Dimmable remote PIR sensor
- D - Dimmable DALI
- M3 - 3 hours integrated emergency
- A3 - Emergency self test
- D3 - DALI self test
- WW - Warm white (3000K)
- DL - Daylight (6500K)
- NB - Narrow beam
- MB - Medium beam
- ASY - Asymmetric



# REVO FOCUS

Large area, high output luminaire

### Order Codes



All dimensions are in millimetres

| Order code   | Description                    | Lumens (lm) | Total power (W) | Efficacy (lm/W) | Weight (kg) |
|--------------|--------------------------------|-------------|-----------------|-----------------|-------------|
| REVFWB900NW  | 60W - 4000K - wide beam (90°)  | 9000        | 60              | 150             | 5.25        |
| REVFWB1200NW | 80W - 4000K - wide beam (90°)  | 12000       | 80              | 150             | 10.50       |
| REVFWB1500NW | 100W - 4000K - wide beam (90°) | 15000       | 100             | 150             | 10.50       |
| REVFWB1800NW | 120W - 4000K - wide beam (90°) | 18000       | 120             | 150             | 10.50       |
| REVFWB2100NW | 140W - 4000K - wide beam (90°) | 21000       | 140             | 150             | 12.70       |
| REVFWB2400NW | 160W - 4000K - wide beam (90°) | 24000       | 160             | 150             | 12.70       |
| REVFWB3000NW | 205W - 4000K - wide beam (90°) | 30000       | 205             | 146             | 12.70       |

### Dimensions

All dimensions are in millimetres

| Order code   | A    | B   | C  |
|--------------|------|-----|----|
| REVFWB900NW  | 600  | 300 | 75 |
| REVFWB1200NW | 1200 | 300 | 75 |
| REVFWB1500NW | 1200 | 300 | 75 |
| REVFWB1800NW | 1200 | 300 | 75 |
| REVFWB2100NW | 1500 | 300 | 75 |
| REVFWB2400NW | 1500 | 300 | 75 |
| REVFWB3000NW | 1500 | 300 | 75 |

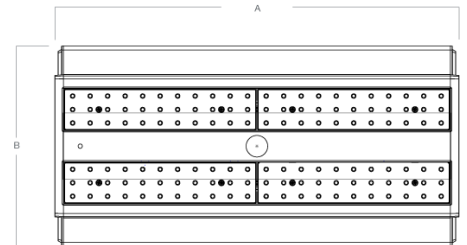

### Installation instructions:

Fixed via rear suspension holes and wired via plug-in 3 pole terminal block

### To specify:

High output LED high bay with optical lens as per Tamlite REVO FOCUS

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.