

SAPPHIRE

High output LED Pendant



Features:

Decorative LED pendant for open areas and atriums
High lumen output suitable for 5-8m mounting heights
Integral emergency version also available
Full range of gear options including DALI and emergency available
CRI: Ra>80
Up to 87 lumens per Watt efficacy
50,000 hours lifetime (L70/B50)

Construction:

Die-cast aluminium body with heat sink
finished in silver (RAL 9022)
Prismatic polycarbonate refractor
Supplied with ceiling fixing plate and 2.0m of cable and wire suspension
Supplied as standard with neutral white (4000K) LED

Options:

DALI - DALI dimming control gear
M3 - 3 hours integrated emergency

SAPPHIRE

High output LED Pendant

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
TSP470NW	47W - 4000K	4100	47	87	3.7

Dimensions

All dimensions are in millimetres

Order code	C	Diameter
TSP470NW	635	405

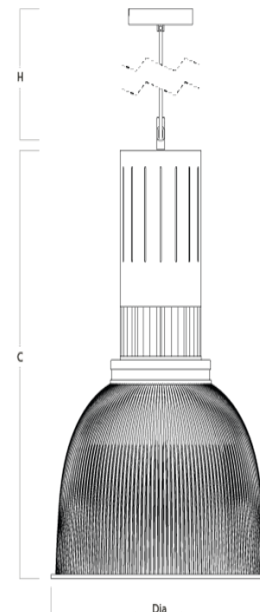

Installation instructions:

Suspended via 2.0m wire to ceiling fixing bracket with 2.0m black cable

To specify:

Decorative LED pendant as per Tamlite Sapphire LED range, supplied with gear and module

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.