

# SAPPHIRE

High output LED Pendant



5 YR

IP20



### Features:

- Decorative pendant suitable for open areas and atriums
- High lumen output ideal for 5-8m mounting heights
- Full range of gear options including DALI and emergency available
- CRI: Ra>80
- Up to 87 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

### Construction:

- Die-cast aluminium body with heat sink finished in silver (RAL 9022)
- Prismatic polycarbonate refractor
- Supplied with ceiling fixing plate and 2.0m of cable and wire suspension
- Supplied as standard with neutral white (4000K) LED

### Options:

- D - DALI dimming control gear
- D3 - DALI self test
- M3 - 3 hours integrated emergency
- A3 - Emergency self test

# SAPPHIRE

High output LED Pendant

### Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
TSP470NW	47W - 4000K	4100	47	87	3.70

### Dimensions

All dimensions are in millimetres

Order code	C	Diameter
TSP470NW	635	405

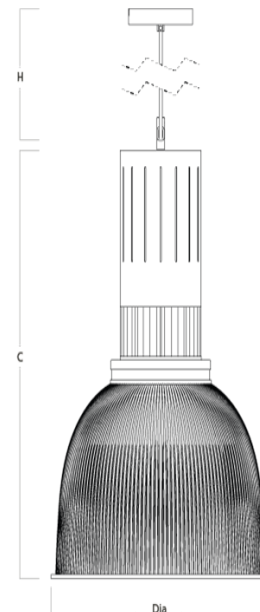

### Installation instructions:

Suspended via 2.0m wire to ceiling fixing bracket with 2.0m black cable

### To specify:

Decorative LED pendant as per Tamlite Sapphire LED range, supplied with gear and module

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.