

SAPPHIRE

High output LED Pendant



5 YR

IP20



Features:

Decorative pendant suitable for open areas and atriums

High lumen output ideal for 5-8m mounting heights

Gear options including DALI and emergency available

CRI: Ra>80

Up to 87 lumens per Watt efficacy

50,000 hours lifetime (L70/B50)

Construction:

Die-cast aluminium body with heat sink

finished in silver (RAL 9022)

Prismatic polycarbonate refractor

Supplied with ceiling fixing plate and 2.0m of cable and wire suspension

Supplied as standard with neutral white (4000K) LED

Options:

D - Dimmable DALI

D3 - DALI self test

M3 - 3 hours integrated emergency

A3 - Emergency self test

SAPPHIRE

High output LED Pendant

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
TSP470NW	47W - 4000K	4100	47	87	3.70

Dimensions

All dimensions are in millimetres

Order code	C	Diameter
TSP470NW	635	405

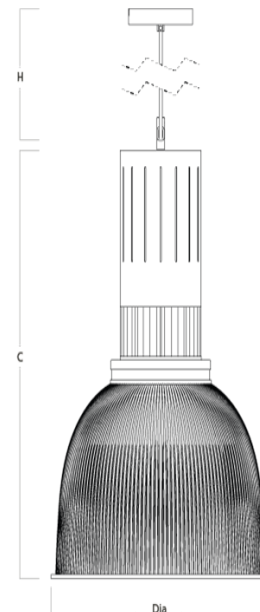

Installation instructions:

Suspended via 2.0m wire to ceiling fixing bracket with 2.0m black cable

To specify:

Decorative LED pendant as per TamLite Sapphire LED range, supplied with gear and module

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact TamLite Lighting.