

SIGNUM CORNER

Suspended corner system



Features:

Suspended corner piece for SIGNUM suspended system

Suitable for stand-alone or continuous versions

Available with opal or microprism optic

T' pieces and 'X' pieces also available

Supplied in 4000K

CRI: Ra>80

Up to 132 lumens per Watt efficacy

50,000 hours lifetime (L90/B10)

Construction:

Extruded aluminium body

Available in white (RAL 9016), grey (RAL 9006) or black (RAL 9005)

PMMA microprism or Polycarbonate opal diffuser

Options:

D - Dimmable DALI

B - Black (RAL 9005)

W - White

MPRM - Micro-prism diffuser

SIGNUM CORNER

Suspended corner system

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
SGL230ONWG	19W - 4000K Opal diffuser - Grey	2300	19	121	2.30
SGL250MPNWG	19W - 4000K - Microprism diffuser -Grey	2500	19	132	2.30

Dimensions

All dimensions are in millimetres

Order code	A	B	C
SGL230ONWG	576	576	75
SGL250MPNWG	576	576	75

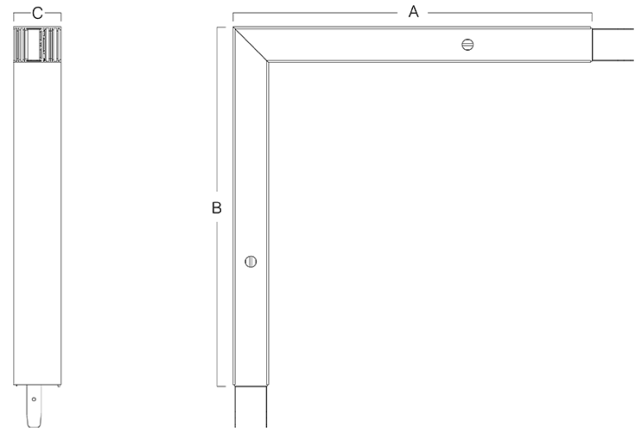

Installation instructions:

To specify:

Suspended corner system as per Tamlite SIGNUM corner range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.