

SIGNUM CORNER R

Recessed corner system



Features:

Recessed corner piece for SIGNUM recessed system

Suitable for stand-alone or continuous versions

Available with opal or microprism optic

Supplied in 4000K

CRI: Ra>80

Up to 116 lumens per Watt efficacy

50,000 hours lifetime (L90/B10)

Construction:

Extruded aluminium body

Available in white (RAL 9016), grey (RAL 9006) or black (RAL 9005)

PMMA microprism or Polycarbonate opal diffuser

Options:

B - Black (RAL 9005)

W - White

MPRM - Micro-prism diffuser

SIGNUM CORNER R

Recessed corner system

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
SGRL280ONWG	25W - 4000K Opal diffuser - Grey	2700	25	108	2.70
SGRL290MPNWG	25W - 4000K Microprism diffuser - Grey	2900	25	116	2.70

Dimensions

All dimensions are in millimetres

Order code	A	B	C
SGRL280ONWG	585	585	75
SGRL290MPNWG	585	585	75

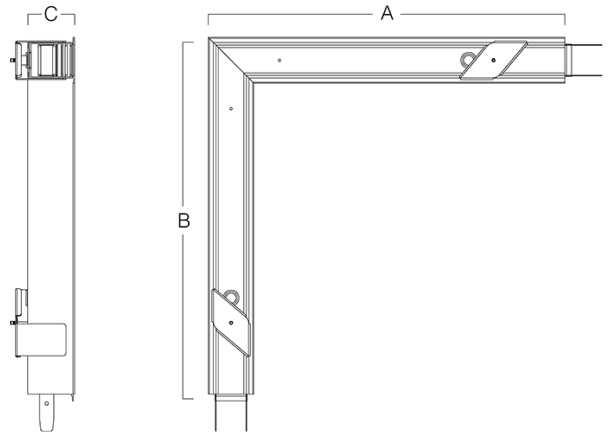

Installation instructions:

To specify:

Recessed corner system as per Tamlite SIGNUM CORNER R range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.