

SLATE

High output LED Wall Light



3 YR

IP44



Features:

Available in 2 different styles - downlight only or uplight/downlight

Particularly suited to both commercial and domestic appliances

Complete with integral 12V driver

CRI: Ra>80

Up to 58 lumens per Watt efficacy

30,000 hours lifetime (L70/B50)

Construction:

Aluminium body finished in grey (RAL 9006)

Supplied as standard with daylight (6500K) LED

Options:

No options available

SLATE

High output LED Wall Light

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
TE-WST1DL	6W - 6500K	350	6	58	1.3
TE-WST2DL	12W - 6500K	700	12	58	1.7

Dimensions

All dimensions are in millimetres

Order code	A	B	C
TE-WST1DL	110	150	126
TE-WST2DL	110	150	134

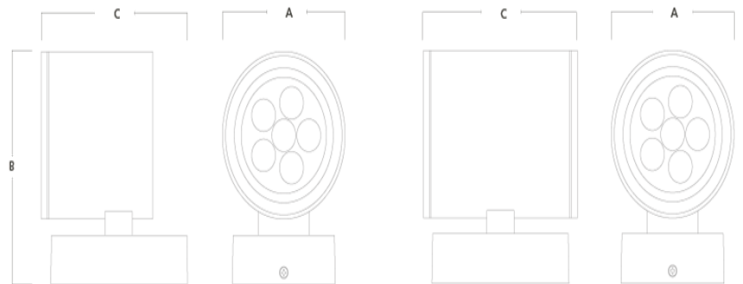

Installation instructions:

Wall mounted via fixing screws

To specify:

Modern high output wall mounted LED fitting supplied with integral driver as per Tamlite SLATE range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.