


SOLAR HALO

Modern LED wall light with halo ring

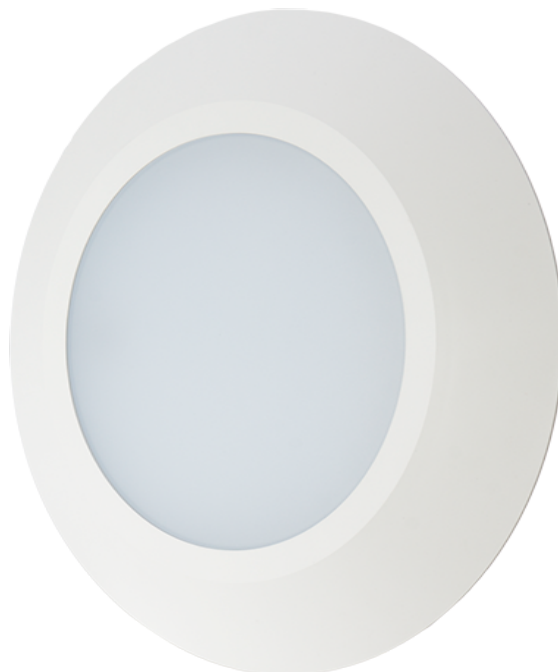

5 YR

IP54



IK08

Features:

High efficacy wall light

3 different models in range (small, large and halo)

Wall or ceiling mount for corridors and staircases

Choice of white or satin chrome trim

Integral sensor and emergency versions

CRI: Ra>80

Up to 108 lumens per Watt efficacy

60,000 hours lifetime (L80/B20)

Construction:

Polycarbonate body finished in white (RAL 9010)

Opal TP(a) diffuser

Supplied as standard with neutral white (4000K) LED

Options:

HFS - Microwave movement sensor

D - Dimmable DALI

M3 - 3 hours integrated emergency

A3 - Emergency self test

D3 - DALI self test

SOLAR HALO

Modern LED wall light with halo ring

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
SLHL220NWW	26W - 4000K - HALO White	2800	26	108	1.50
SLHL220NWWSC	26W - 4000K - HALO Satin chrome	2800	26	108	1.50

Dimensions

All dimensions are in millimetres

Order code	C	Diameter
SLHL220NWW	72	436
SLHL220NWWSC	72	436

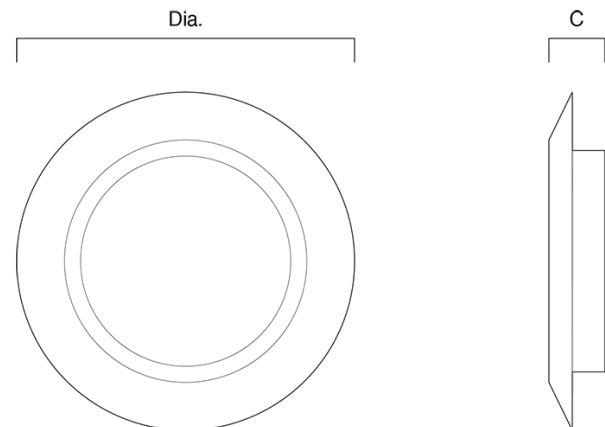

Installation instructions:

Wall or ceiling fix wired via rear or 20mm side knock-outs

To specify:

Circular IP54 white / opal bulkhead as per Tamlite SOLAR HALO range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.