

SOLAR S

Modern LED wall light with small trim



5 YR

IP65



IK08

Features:

- High efficacy wall light
- 3 different models in range (small, large and halo)
- Wall or ceiling mount for corridors and staircases
- Choice of white or satin chrome trim
- Integral sensor and emergency versions
- CRI: Ra>80
- Up to 120 lumens per Watt efficacy
- 60,000 hours lifetime (L80/B20)

Construction:

- Polycarbonate body finished in white (RAL 9010)
- Opal TP(a) diffuser
- Supplied as standard with neutral white (4000K) LED

Options:

- HFS - Microwave movement sensor
- D - Dimmable DALI
- M3 - 3 hours integrated emergency
- A3 - Emergency self test
- D3 - DALI self test

SOLAR S

Modern LED wall light with small trim

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
SLRS220NWW	19W - 4000K - White	2200	19	116	1.40
SLRS220NWSC	19W - 4000K - Satin chrome	2200	19	116	1.40
SLRS300NWW	25W - 4000K - White	3000	25	120	1.40
SLRS300NWSC	25W - 4000K - Satin chrome	3000	25	120	1.40

Dimensions

All dimensions are in millimetres

Order code	C	Diameter
SLRS220NWW	72	330
SLRS220NWSC	72	330
SLRS300NWW	72	330
SLRS300NWSC	72	330

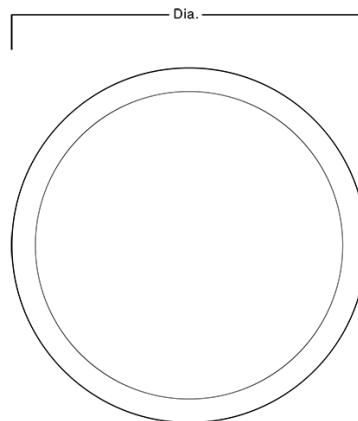

Installation instructions:

Wall or ceiling fix wired via rear or 20mm side knock-outs

To specify:

Circular IP65 white / opal bulkhead as per Tamlite SOLAR range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.