

SOLO

LED linear system



5 YR

IP20



Features:

Modern surface or recessed LED linear system with opal diffuser (option for micro-prism diffuser)
Suitable for open areas, schools and offices
Wire suspension or ceiling fix mounting option
Continuous run versions available
Available in 2 colour options
Full range of gear options including dimmable, DALI and emergency available
CRI: Ra>80
Up to 123 lumens per Watt efficacy
50,000 hours lifetime (L70/B50)

Construction:

Extruded aluminium body finished in white (RAL 9016) or grey (RAL 9006)
High performance opal diffuser gives optimum efficiency
Die-cast aluminium end caps
Opal polycarbonate diffuser also available
Supplied as standard with neutral white (4000K) LED

Options:

HFR - High frequency analogue dimming
HFD - Digital dimmable version
D - DALI dimming control gear
MPRM - Micro-prism diffuser

SOLO

LED linear system

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
TMR20204280NW	36W - 4000K	2800	36	77	3.50
TM20204280NW	36W - 4000K	2800	36	78	3.75
TMR20205350NW	44W - 4000K	3500	44	79	4.50
TM20205350NW	44W - 4000K	3500	44	80	4.25

Dimensions

All dimensions are in millimetres

Order code	A	B	C
TMR20204280NW	1165	86	65
TM20204280NW	1165	65	65
TMR20205350NW	1455	86	65
TM20205350NW	1455	65	65

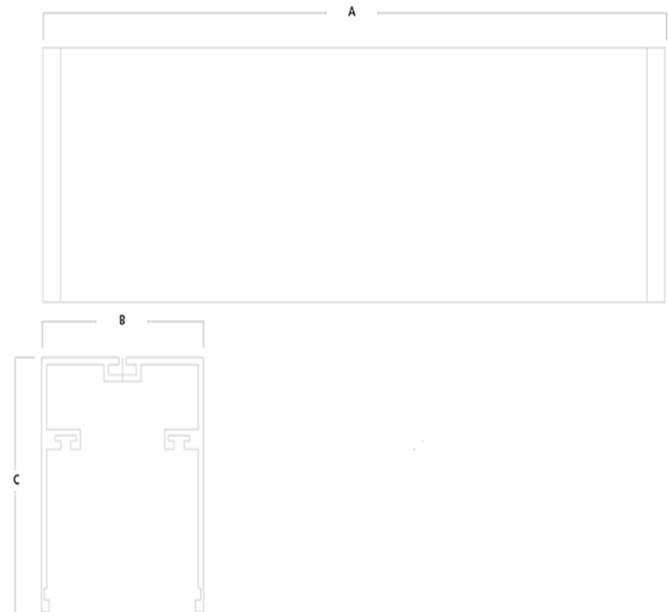

Installation instructions:

Surface mount or suspended via wire suspension kit (supplied separately)

To specify:

Suspended or ceiling mounted, linear modules with diffuser as per Tamlite SOLO range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.