

STADIA

High output floodlight



5 YR

IP65



Features:

- High output floodlight for sports or large area lighting
- High quality thermal management chamber to maintain life and efficiency
- Upto 85,000 lumen output for 8-15m mounting height
- Custom Optics for asymmetric distribution
- Gear options including DALI available
- CRI: Ra>80
- Up to 133 lumens per Watt efficacy
- 50,000 hours lifetime (L80/B10)

Construction:

- Die-cast aluminium body
- Cree XTE Led chip array
- Supplied as standard with neutral white (4000K) LED

Options:

- D - Dimmable DALI
- MB - Medium beam

STADIA

High output floodlight

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
STA420NWNB	300W - 4000K	40000	300	133	10.30
STA630NWNB	450W - 4000K	60000	450	133	21.40
STA850NWNB	600W - 4000K	80000	600	133	22.25

Dimensions

All dimensions are in millimetres

Order code	A	B	C
STA420NWNB	571	322	94
STA630NWNB	621	601	104
STA850NWNB	621	601	104

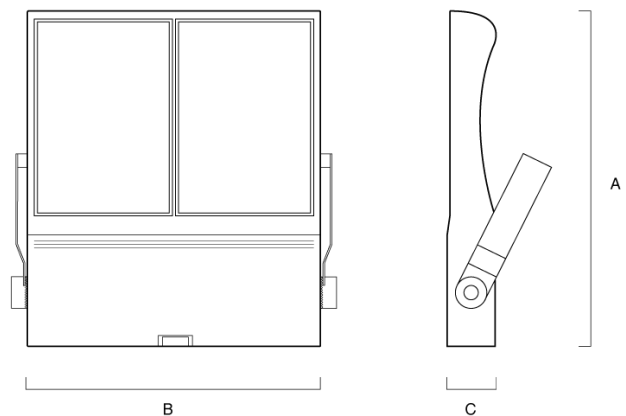

Installation instructions:

Fixed via stirrup bracket and wired via rear cable entry, multiple bracketry is available for wall and column mount.

To specify:

High performance floodlight, as per Tamlite STADIA range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.