

TMH LED

High output adjustable LED downlight



5 YR

IP20



Features:

High output, adjustable LED downlight
Recessed fixture suitable for entrance areas and retail
Gear options including dimmable, DALI and emergency available

Construction:

Die-cast aluminium body
Remote plug-in driver
Fully adjustable up to 50°, tilt
Supplied as standard with neutral white (4000K) LED

Options:

No options available

TMH LED

High output adjustable LED downlight

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
TMHLED280NW	30W - 4000K	2800	30	93	1.24

Dimensions

All dimensions are in millimetres

Order code	A	B	C
TMHLED280NW	228	138	138

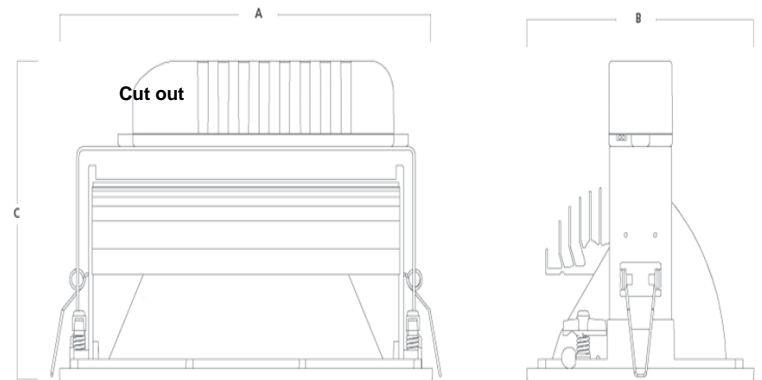

Cut Out: 221 x 127

Installation instructions:

Recessed into plasterboard or exposed grid ceiling via spring clip

To specify:

High output adjustable LED downlight as per Tamlite TMH range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.