


TREM

Recessed lay in LED modular

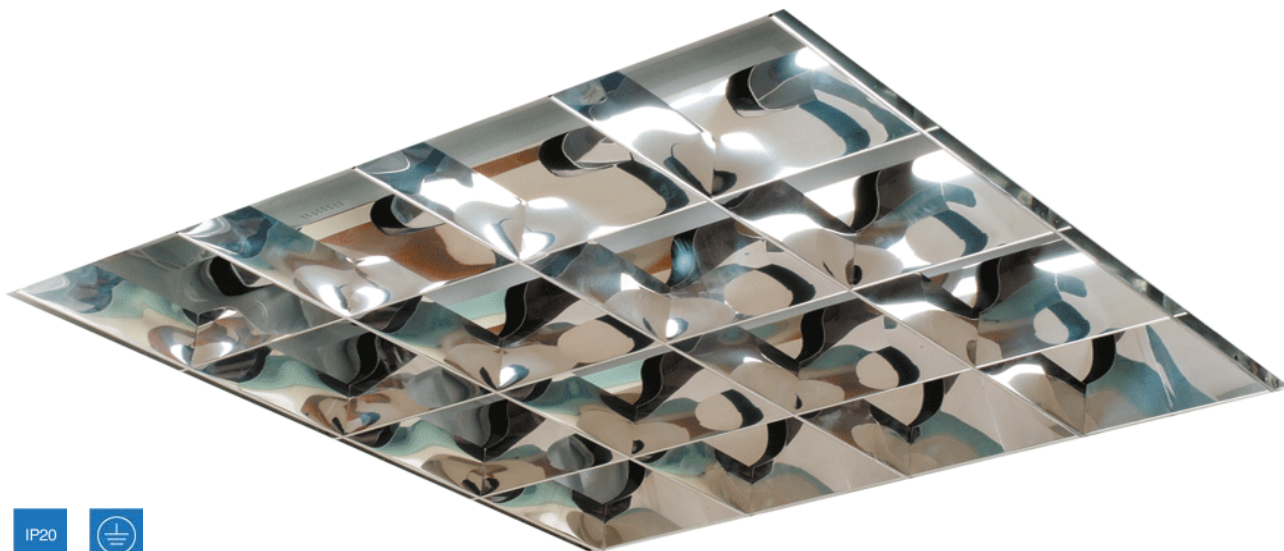

1 YR

IP20



Features:

- Gear cover provides neat fitted appearance
- Wide range of louvre and diffuser attachments
- Complete with lamp(s)
- Reduced maintenance with extra long-life lamps
- Designed for commercial installations

Construction:

- Steel body finished in white (RAL 9016)
- Ribbed sides provide extra strength

Options:

- HF - High frequency control gear
- HFR - High frequency analogue dimming
- HFD - Digital dimmable version
- M3 - 3 hours integrated emergency

TREM

Recessed lay in LED modular

Order Codes

All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
TREM418LED0VDT	4 x 18W LED T8		0		9.8
TREM410LED0VDT	4 x 10W LED T8		0		4.9
TREM186470	4 x 70W T8		0		14.1
TREM126336	3 x 36W T8		0		8.5
TREM126436	4 x 36W T8		0		9.3
TREM66318	3 x 18W T8		0		4.7
TREM66418	4 x 18W T8		0		4.8
TREM126328	3 x 28W T5		0		5.2
TREM126428	4 x 28W T5		0		5.4
TREM66314	3 x 14W T5		0		2.9
TREM66414	4 x 14W T5		0		3

Dimensions

All dimensions are in millimetres

Order code	A	B	C	Cut out
TREM418LED0VDT	1230	595	82	
TREM410LED0VDT	625	595	82	
TREM186470	1795	595	75	
TREM126336	1230	595	82	
TREM126436	1230	595	82	
TREM66318	625	595	82	
TREM66418	625	595	82	
TREM126328	1230	595	82	
TREM126428	1230	595	82	
TREM66314	625	595	82	
TREM66414	625	595	82	

Installation instructions:

Recessed lay-in for exposed T ceiling grid

To specify:

Recessed lay-in fluorescent module as per Tamlite TREM range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.



Tamlite Sales Centre.
Tel: 01527 517777
Fax: 01527 517666
e-mail: sales@tamlite.co.uk

Tamlite Technical.
Tel: 01952 292441
Fax: 01952 292155
e-mail: technical@tamlite.co.uk

