

TWINSPOT ST

Self test LED Emergency Twinspot



5 YR

IP65



Features:

- Suitable for warehouse, industrial or retail applications
- High quality spot heads eliminate the need for replacement
- Self test version for reduced emergency lighting maintenance
- Conduit entry for through wiring
- Virtually service free emergency lighting
- IP65 weatherproof rating
- 30,000 hours lifetime (L70/B50)

Construction:

- Polycarbonate body in white (RAL 9006)
- Integral driver
- Supplied as standard with neutral white (4000K) LED

Options:

- No options available

TWINSPOT ST

Self test LED Emergency Twinspot

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
TSTA3	4W - 4000K		4		1.60

Dimensions

All dimensions are in millimetres

Order code	A	B	C
TSTA3	300	290	65

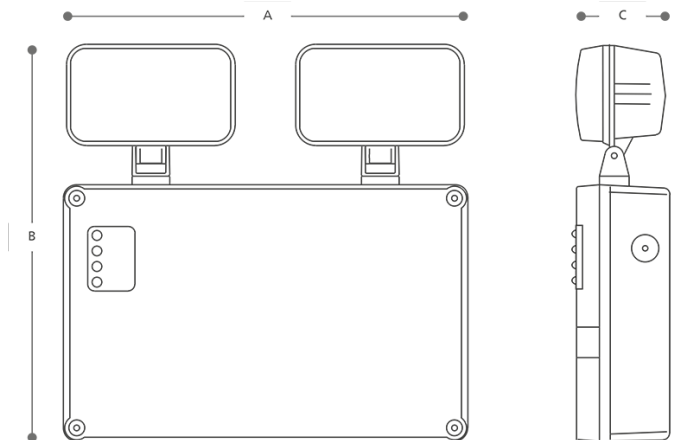

Installation instructions:

Wall fix via rear-mounted fixing and cable entry

To specify:

LED emergency twinspot as per Tamlite Twinspot ST LED range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.