

TX

Recessed LED sealed module



Features:

- Sealed to IP65 rating for medical and cleanrooms
- Wide range of diffusers
- Driver gear options of DALI, Emergency and Ready2Mains dimming available
- CRI: Ra>80
- Up to 111 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

Construction:

- Steel body finished in white (RAL 9016)
- Self-tightening fixing clips
- Glass, VDT, micro-prism, opal or prismatic polycarbonate diffuser options
- Extruded aluminium frame with silicone gasket
- Supplied as standard with neutral white (4000K) LED

Options:

- HFR - High frequency analogue dimming
- D - DALI dimming control gear
- D3 - DALI self test
- M3 - 3 hours integrated emergency
- A3 - Emergency self test
- WW - Warm white (3000K)
- CW - Cool white (5000K)

TX

Recessed LED sealed module

Order Codes



All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
TSMXOP66390NW	35W - 4000K	3900	35	111	6.90
TSMXOP123390NW	35W - 4000K	3900	35	111	10.20
TSMXOP126780NW	70W - 4000K	7800	70	111	12.50

Dimensions

All dimensions are in millimetres

Order code	A	B	C
TSMXOP66390NW	595	595	76
TSMXOP123390NW	1195	295	76
TSMXOP126780NW	1195	595	76

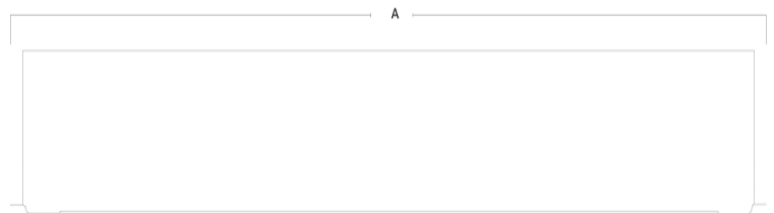

Installation instructions:

Recessed lay-in for exposed 25mm ceiling grid. Brackets available for plasterboard mount. Frame available for metal pan ceilings

To specify:

Recessed IP65 LED module with opal diffuser as per Tamlite TX LED range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.