

TYPHOON

Recessed sealed LED module



Features:

- Recessed sealed module for areas where a high degree of protection is required
- Rated IP54 from underside of ceiling
- IK10 impact resistance
- Ideal for commercial kitchens, changing rooms and other areas where splash protection is required
- Gear options including dimmable, DALI and emergency available
- CRI: Ra>80
- Up to 120 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

Construction:

- Steel body finished in white (RAL 9016)
- Polycarbonate TP(a) high efficiency opal diffuser
- Supplied as standard with neutral white (4000K) LED

Options:

- HFS - Microwave movement sensor
- HFD - Digital dimmable version
- HFSD - Dimmable microwave movement sensor
- D - Dimmable DALI
- M3 - 3 hours integrated emergency
- A3 - Emergency self test
- NL - Night-light

TYPHOON

Recessed sealed LED module

Order Codes


All dimensions are in millimetres

| Order code | Description | Lumens (lm) | Total power (W) | Efficacy (lm/W) | Weight (kg) |
|--------------|-------------|-------------|-----------------|-----------------|-------------|
| TSM66300NW | 25W - 4000K | 3000 | 25 | 120 | 5.50 |
| TSM66400NW | 34W - 4000K | 4000 | 34 | 118 | 5.50 |
| TSM66500NW | 44W - 4000K | 5000 | 44 | 114 | 5.50 |
| TSM126600NW | 50W - 4000K | 6000 | 50 | 120 | 10.00 |
| TSM126800NW | 68W - 4000K | 8000 | 68 | 118 | 10.00 |
| TSM1261000NW | 87W - 4000K | 10000 | 87 | 115 | 10.00 |

Dimensions

All dimensions are in millimetres

| Order code | A | B | C |
|--------------|------|-----|----|
| TSM66300NW | 595 | 595 | 95 |
| TSM66400NW | 595 | 595 | 95 |
| TSM66500NW | 595 | 595 | 95 |
| TSM126600NW | 1195 | 595 | 95 |
| TSM126800NW | 1195 | 595 | 95 |
| TSM1261000NW | 1195 | 595 | 95 |

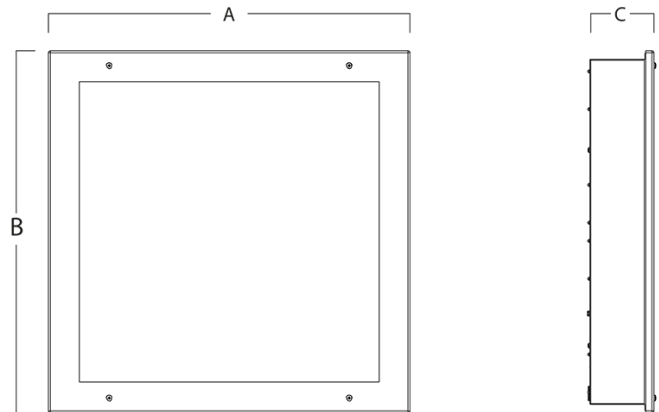

Installation instructions:

Recessed lay-in for exposed 25mm ceiling grid. Suitable for plasterboard mount. Other sizes available for metal pan ceilings

To specify:

Recessed sealed IP54 module as per Tamlite TYPHOON range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.