

# ULTRA

Recessed LED downlight



5 YR

IP20



### Features:

- Ideal for retail applications
- Wide range of optional accessories available
- Available in 4 lumen packages and 2 body sizes
- Gear options including dimmable, DALI and emergency available
- CRI: Ra>80
- Up to 107 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

### Construction:

- Pressed steel body with die-cast heat sink finished in white (RAL 9003)
- Polished aluminium reflector
- Remote driver
- Supplied as standard with neutral white (4000K) LED

### Options:

- HFR - High frequency analogue dimming
- HFD - Digital dimmable version
- D - Dimmable DALI
- RM3 - Remote maintained 3 hours emergency
- WW - Warm white (3000K)

# ULTRA

Recessed LED downlight

### Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
ULT200LED1100NW	11W - 4000K	1100	11	100	3.00
ULT260LED1100NW	11W - 4000K	1100	11	100	3.15
ULT200LED2000NW	19W - 4000K	1900	19	100	3.00
ULT260LED2000NW	19W - 4000K	1900	19	100	3.15
ULT200LED3000NW	28W - 4000K	3000	28	107	3.00
ULT260LED3000NW	28W - 4000K	3000	28	107	3.15
ULT200LED5000NW	47W - 4000K	4700	47	100	3.00
ULT260LED5000NW	48W - 4000K	4800	48	100	3.15

### Dimensions

All dimensions are in millimetres

Order code	C	Diameter	Cut out
ULT200LED1100NW	175	200	180
ULT260LED1100NW	185	260	240
ULT200LED2000NW	175	200	180
ULT260LED2000NW	185	260	240
ULT200LED3000NW	175	200	180
ULT260LED3000NW	185	260	240
ULT200LED5000NW	175	200	180
ULT260LED5000NW	185	260	240

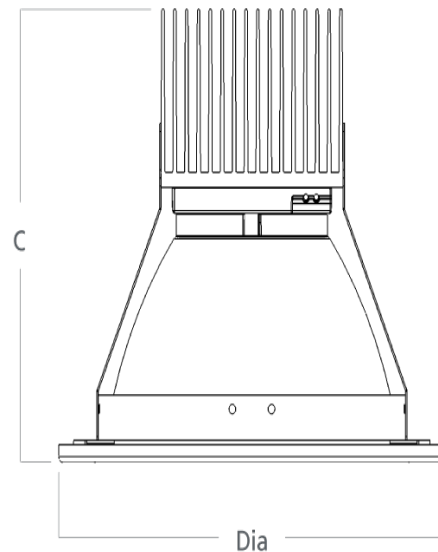

### Installation instructions:

Recessed into plasterboard or exposed grid ceiling via spring clips

### To specify:

Circular recessed LED downlight as per Tamlite ULTRA LED range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.