

XTREME

IP65 LED weatherproof, polycarbonate luminaire



5 YR

IP65



Features:

- Suitable for internal or external use of industrial areas
- Moisture-proof and dust-resistant IP65 fixture
- Supplied with TAMTEC LED modules
- Impact resistant construction
- Full range of gear options including dimmable, DALI and emergency available
- CRI: Ra>80
- Up to 132 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

Construction:

- Grey polycarbonate body
- Supplied with opal diffuser
- Integral driver
- Stainless steel fixing clips
- Supplied as standard with neutral white (4000K) LED

Options:

- V205 - Batten-fit PIR
- V206 - Batten-fit PIR and photocell
- V208 - Batten-fit with daylight dimming
- HFS - Microwave movement sensor
- HFSD - Dimmable microwave movement sensor
- D - DALI dimming control gear
- D3 - DALI self test
- M3 - 3 hours integrated emergency
- A3 - Emergency self test

XTREME

IP65 LED weatherproof, polycarbonate luminaire

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
EWPL1430NW	23W - 4000K	3000	23	130	2.20
EWPL1537NW	28W - 4000K	3700	28	132	2.60
EWPL2460NW	46W - 4000K	6000	46	130	2.90
EWPL1560NW	51W - 4000K	6000	51	118	2.60
EWPL2574NW	57W - 4000K	7400	57	130	3.55
EWPL25100NW	91W - 4000K	10000	91	110	3.55

Dimensions

All dimensions are in millimetres

Order code	A	B	C
EWPL1430NW	1268	100	101
EWPL1537NW	1568	100	101
EWPL2460NW	1268	158	101
EWPL1560NW	1568	100	101
EWPL2574NW	1568	158	101
EWPL25100NW	1568	158	101

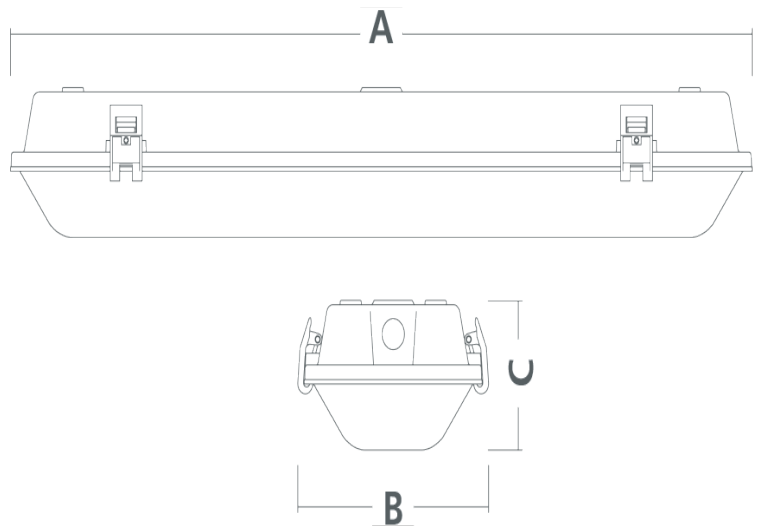

Installation instructions:

Ceiling fix via suspension points or ceiling mount brackets

To specify:

Weatherproof Luminaire as per Tamlite XTREME range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.