

BLUEWATER

Asymmetric LED wallwasher, suitable for retail or display areas



5 YR

IP20



Features:

- Dedicated recessed or surface retail wallwasher
- High performance aluminium reflector
- Available in 2 body sizes
- Driver gear options of DALI and Ready2Mains dimming available
- CRI: Ra>80
- Up to 108 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

Construction:

- Steel body finished in white (RAL 9016)
- Polished aluminium asymmetric reflector
- Supplied as standard with neutral white (4000K) LED

Options:

- HFR - High frequency analogue dimming
- HFD - Digital dimmable version
- D - DALI dimming control gear

BLUEWATER

Asymmetric LED wallwasher, suitable for retail or display areas

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
TASYS280NW	26W - 4000K	2800	26	108	2.4
TASYR280NW	26W - 4000K	2800	26	108	2.4
TASYS560NW	52W - 4000K	5600	52	108	4.8
TASYR560NW	52W - 4000K	5600	52	108	4.8

Dimensions

All dimensions are in millimetres

Order code	A	B	C
TASYS280NW	570	225	100
TASYR280NW	595	225	100
TASYS560NW	1170	225	100
TASYR560NW	1195	225	100

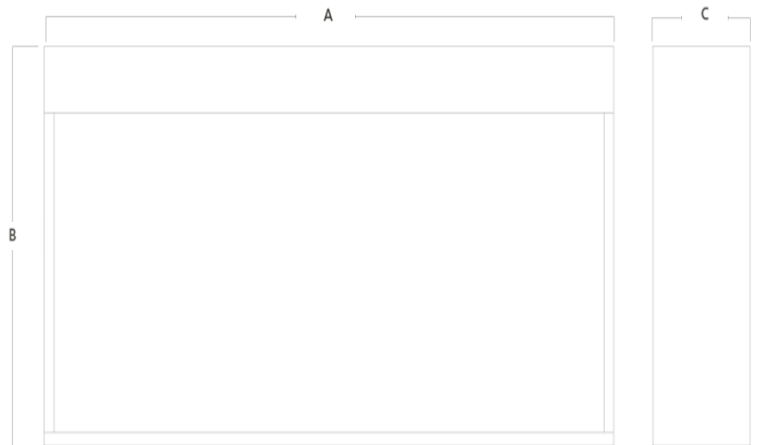

Installation instructions:

Recessed into exposed T Bar ceiling and wired to 3-pole terminal block

To specify:

Recessed or surface asymmetric LED module as per Tamlite Bluewater LED range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.