

EXPLORER

High performance LED floodlight, asymmetric or double asymmetric



5 YR

IP65



Features:

- High performance floodlight suitable for car parking and sports applications
- Range of 6 different outputs in 3 body sizes
- Choice of asymmetric or double asymmetric beam angles
- CRI: Ra>80
- Up to 125 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

Construction:

- Die-cast aluminium body finished in grey (RAL 9006)
- Fully adjustable stirrup
- Glass cover
- Integral driver
- Supplied as standard with neutral white (4000K) LED

Options:

- D - Dimmable DALI

EXPLORER

High performance LED floodlight, asymmetric or double asymmetric

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
EXPFLDA480NW	40W - 4000K	4800	40	120	4.30
EXPFLA480NW	40W - 4000K	4800	40	120	4.30
EXPFLDA720NW	60W - 4000K	7200	60	120	4.50
EXPFLA720NW	60W - 4000K	7200	60	120	4.50
EXPFLDA1250NW	100W - 4000K	12500	100	125	6.30
EXPFLA1250NW	100W - 4000K	12500	100	125	6.30
EXPFLDA1800NW	150W - 4000K	18000	150	120	6.80
EXPFLA1800NW	150W - 4000K	18000	150	120	6.80
EXPFLDA2400NW	200W - 4000K	24000	200	120	8.60
EXPFLA2400NW	200W - 4000K	24000	200	120	8.60
EXPFLDA2800NW	240W - 4000K	28000	240	117	8.90
EXPFLA2800NW	240W - 4000K	28000	240	117	8.90

Dimensions

All dimensions are in millimetres

Order code	A	B	C
EXPFLDA480NW	359	308	82
EXPFLA480NW	359	308	82
EXPFLDA720NW	359	308	82
EXPFLA720NW	359	308	82
EXPFLDA1250NW	413	366	83
EXPFLA1250NW	413	366	83
EXPFLDA1800NW	413	366	83
EXPFLA1800NW	413	366	83
EXPFLDA2400NW	452	462	87
EXPFLA2400NW	452	462	87
EXPFLDA2800NW	452	462	87
EXPFLA2800NW	452	462	87

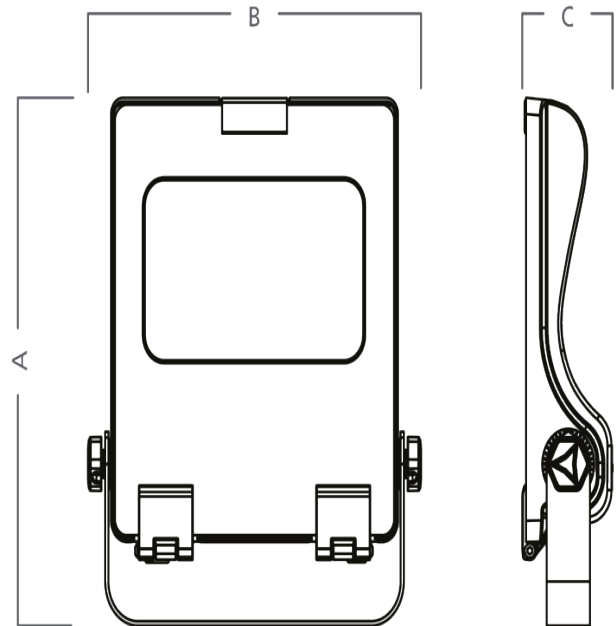

Installation instructions:

Fixed via stirrup bracket and wired via rear cable entry, multiple bracketry is available for wall and column mount.

To specify:

High performance LED floodlight, as per Tamlite EXPLORER range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.